H&O DIE SUPPLY, INC. 1-800-222-5441 sales@hodie.com

AUTOGAUGE G48 PLATE GAUGE FOR HEAVY FORMING


DUAL DRIVE

EXTRA SAVINGS BECAUSE HANDLING PLATE IS MORE LABOR INTENSIVE THAN SHEET METAL

The G48 offers significant productivity improvement because handling larger, heavier workpieces often involves 2 or more operators and material handling equipment. Although these handling methods may still be employed, once the workpiece is maneuvered to the bending die it can be sequenced through the bends as the backgauge repositions on each ram cycle.

TIME SAVINGS EVEN ON SINGLE-BEND WORKPIECES

Considerable time is involved setting a manual backstop for a solitary bend on plate. The stop must be very rigid and making changes on such a bulky apparatus is time consuming. Some operators resort to layout and scribing which is equally time consuming. The G48 lets the operator punch in the dimension and bend in seconds.



49" TRAVEL FILLS A VOID **ON LARGE FLANGE SHEET** METAL APPLICATIONS

Traditional 24" travel backgauges prohibit deep flanges on some workpieces. The G48 opens that range up to 49".

AUTOMEC

82 CALVARY STREET WALTHAM, MA 02453-5918



TECHNICAL SPECIFICATIONS

TRIPLE DRIVE

Recommended press brake width (Between side frames)	96″ to 144″	Recommended width (Between
Tilting gauge bar	std.	Tilting gauge b
No. of drive screws	2	No. of drive sci
Gauge height adj.	12″	Gauge height a
Gauge travel	49″	Gauge travel
Gauge speed	600″/minute	Gauge speed
Resolution	.001″	Resolution
Repeatability	±.002″	Repeatability
Workblocks supplied	4	Workblocks su
GF-8 flip fingers supplied	4	GF-8 flip finger
Horizontal calibration adjustment	16″	Horizontal calib
Holding force	400 lbs.	Holding force
Std. gaugebar length	11'	Std. gaugebar I
O.A. Width	84″	0.A. Width
O.A. Height	32″	O.A. Height
O.A. Depth (front to rear)	75″	O.A. Depth (fro
Gauge bar shock mounts	std.	Gauge bar sho
Rear support legs	std.	Rear support le
Shipping weight	590 lbs.	Shipping weigh


Recommended press brake width (Between side frames)	144″ to 288″
Tilting gauge bar	std.
No. of drive screws	3
Gauge height adj.	12″
Gauge travel	49″
Gauge speed	600″/minute
Resolution	.001″
Repeatability	±.002″
Workblocks supplied	4
GF-8 flip fingers supplied	4
Horizontal calibration adjustment	16″
Holding force	600 lbs.
Std. gaugebar length	18'
0.A. Width	168″
O.A. Height	32″
O.A. Depth (front to rear)	75″
Gauge bar shock mounts	std.
Rear support legs	std.
Shipping weight	750 lbs.

Telephone: 781-893-3403 • Fax: 781-899-5708 E-mail: automec@automec.com

WEBSITE: WWW.AUTOMEC.COM

H&O DIE SUPPLY, INC. 1-800-222-5441 sales@hodie.com

AUTOGAUGE G48 PLATE GAUGE FOR HEAVY FORMING

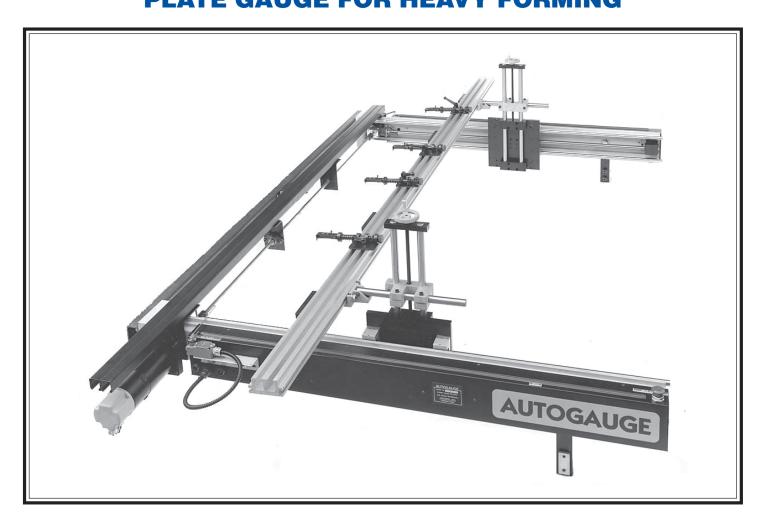

Programmable backgauging for pressbrakes has always offered impressive productivity savings for medium and short runs on light sheet metal. Now, the G48 for Pressbrakes brings those same savings when forming heavier materials.



AUTOMEC, INC. 82 Calvary Street, Waltham, MA 02453-5918 Telephone: 781-893-3403 • Fax: 781-899-5708 • E-mail: automec@automec.com • Website: <u>www.automec.com</u>