



LIFT RANGE	500 LB. CAPACITY MODELS			2000 LB. CAPACITY MODELS		
	MODEL NO.	SIZE	SHIPPING WT. (LBS.)	MODEL NO.	SIZE	SHIPPING WT. (LBS.)
36" - 53"	EM-2336-05H	24" x 36"	287	EM-2336-2H	24" x 36"	364
34" - 51"	EM-2334-05H	24" x 36"	285	EM-2334-2H	24" x 36"	362
32" - 49"	EM-2332-05H	24" x 36"	283	EM-2332-2H	24" x 36"	360
30" - 47"	EM-2330-05H	24" x 36"	281	EM-2330-2H	24" x 36"	358

Above models provided with (2) rigid, (2) swivel 5" dia. rubber-tired casters and (1) floor lock. Steel, polyurethane or composition wheels are optional.

Above models provided with (2) rigid, (2) swivel 5" dia. steel casters and (1) floor lock. Polyurethane or composition wheels are optional.

**ALL MODELS INCLUDE:**

- A 12 volt electro-mechanical lifting unit with a lifting speed of approx. 0.2125 inches per second for more accurate aligning of table top to matching surfaces.
- A 12 volt heavy-duty battery.
- A hand-held control switch on a 6-foot long coiled cord.
- Two triple-telescoping guides for stabilizing the top.
- Battery charger is included.



**Portable Hydraulic LIFT TABLES**

MOST STANDARD DESIGNS ARE ALSO AVAILABLE IN ELECTRIC-HYDRAULIC AND AIR-OPERATED VERSIONS

**TOP & BASE SIZE = 30 x 30**

Lift Ranges: 31" to 54"	Capacities: 3000#
30" to 52"	4000#
28" to 48"	5000#
26" to 44"	6000#
24" to 40"	

The above "compact" models include (2) rigid & (2) swivel 6" dia. steel casters and (1) floor lock.




FOOT OPERATED OR ELECTRIC HYDRAULIC

**TOP & BASE SIZE = 30 x 48**

Lift Ranges: 31" to 54"	Capacities: 3000#
30" to 52"	4000#
28" to 48"	5000#
26" to 44"	6000#
24" to 40"	

The above "medium duty" models include (4) swivel 6" dia. steel casters & (2) floor locks.

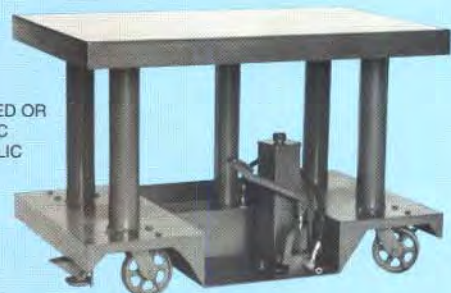

FOOT OPERATED OR ELECTRIC HYDRAULIC