



THE VIBRO
TRANSPORTER



COMPANY PROFILE

PRODUCT OVERVIEW

APPLICATIONS

NEWS

CONTACT VIBRO

Model 250 Air Transporter

For lighter loads, the Model 250 Air Transporter is designed to move 25 lbs of material. The 250 comes with a two year warranty, provides variable speed control (15-40 ft./min.) and is available from stock.

Key Features Include:

- Two Year Warranty
- No Mechanical Springs
- Low Air Consumption
- Variable Speed (12-40 ft./min.)
- Available from Stock
- 100% American Made

Optional Features Include:


- A Cover Guard for harsh environments
- Quick Clamps for fast tray removal
- Adjustable Bearing Support for trays
- A [Motion Sensor](#) that automatically shuts down machinery if air supply is ever interrupted

Specifications

	Model 250
Air Pressure Range	35 - 80
Air Consumption (CFM)	
	0.7
Feed Rate (feet per minute)	12 - 35
Sound Level (db-A)	60
Maximum Load (lbs)	25
Maximum Weight of Tray (lbs)	3
Transporter Weight (lbs)	2



The Vibro Model 250 Air Transporter

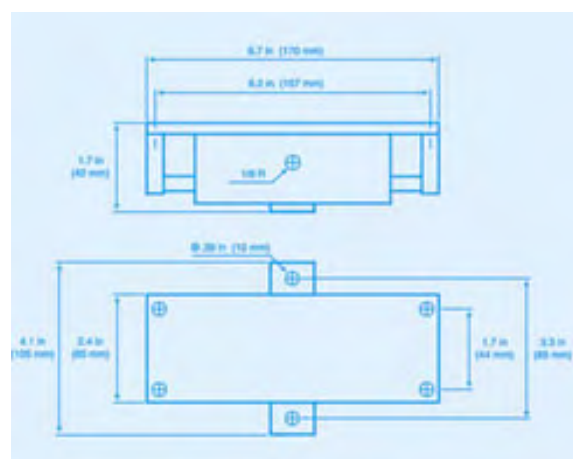

Click the drawing above for a larger view

Global Distribution

 **Upton & Sullivan Co. Ltd.**
Ontario, Canada

FOSMO MASKIN AS
Oslo, Norway

Site design &
maintenance by
[AdSpeak](#)

