


H&O-KICKER SPRING-PINS

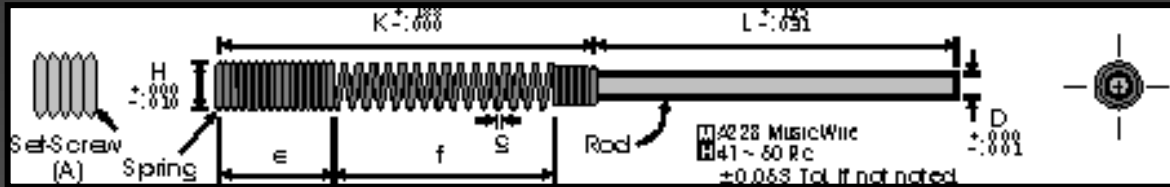

DIE BUILDERS – Reduce costs by using this simplified slug ejection method. Merely cut spring & pin to suit application.

ECONOMY ▲ VERSATILITY ▲ EASE OF ASSEMBLY

Unikix Spring-Pins* (Order No.)	Rod Length (L)	Rod Dia. (D)	Spring Length (K)	Spring Dia. (H)	Spring Base-Length (e)	Spring Coil-Length (f)	Spring Wire Dia. (g)	Spring Force-Constant (Lbs/Inch)	Total Active Spring Coils	Hole Dia. for Rod (HS)	Hole Dia. for Spring (HR)	Set-Screw Size (A)
HOD-KP-20	3.00	0.020	2.06	0.076	1.00	0.75	0.010	3.1	16	0.025	0.086	3-48
HOD-KP-26	3.00	0.026	2.25	0.100	1.25	0.75	0.014	7.2	12	0.031	0.110	5-40
HOD-KP-41	3.00	0.041	2.50	0.131	1.25	1.00	0.018	6.2	17	0.046	.0144	8-32
HOD-KP-55	4.00	0.055	2.75	0.161	1.375	1.125	0.023	6.7	23	0.062	0.166	10-32
HOD-KP-86	4.00	0.086	2.625	0.211	1.50	1.125	0.026	6.1	17	0.094	0.221	1/4-28
HOD-KP-148	4.00	0.148	3.50	0.305	1.50	1.75	0.041	13.8	16	0.156	0.312	3/8-16



7200 INTERSTATE 20 • KENNEDALE TX 76060

817-985-0040 • FAX: 817-985-0046 • TOLL FREE: 800-222-5441

EMAIL: sales@hodie.com • WEBSITE: www.hodie.com