


H&O DIE SUPPLY, INC.

sales@hodie.com • 800-222-5441

MODEL

613

Manual Bandsaw

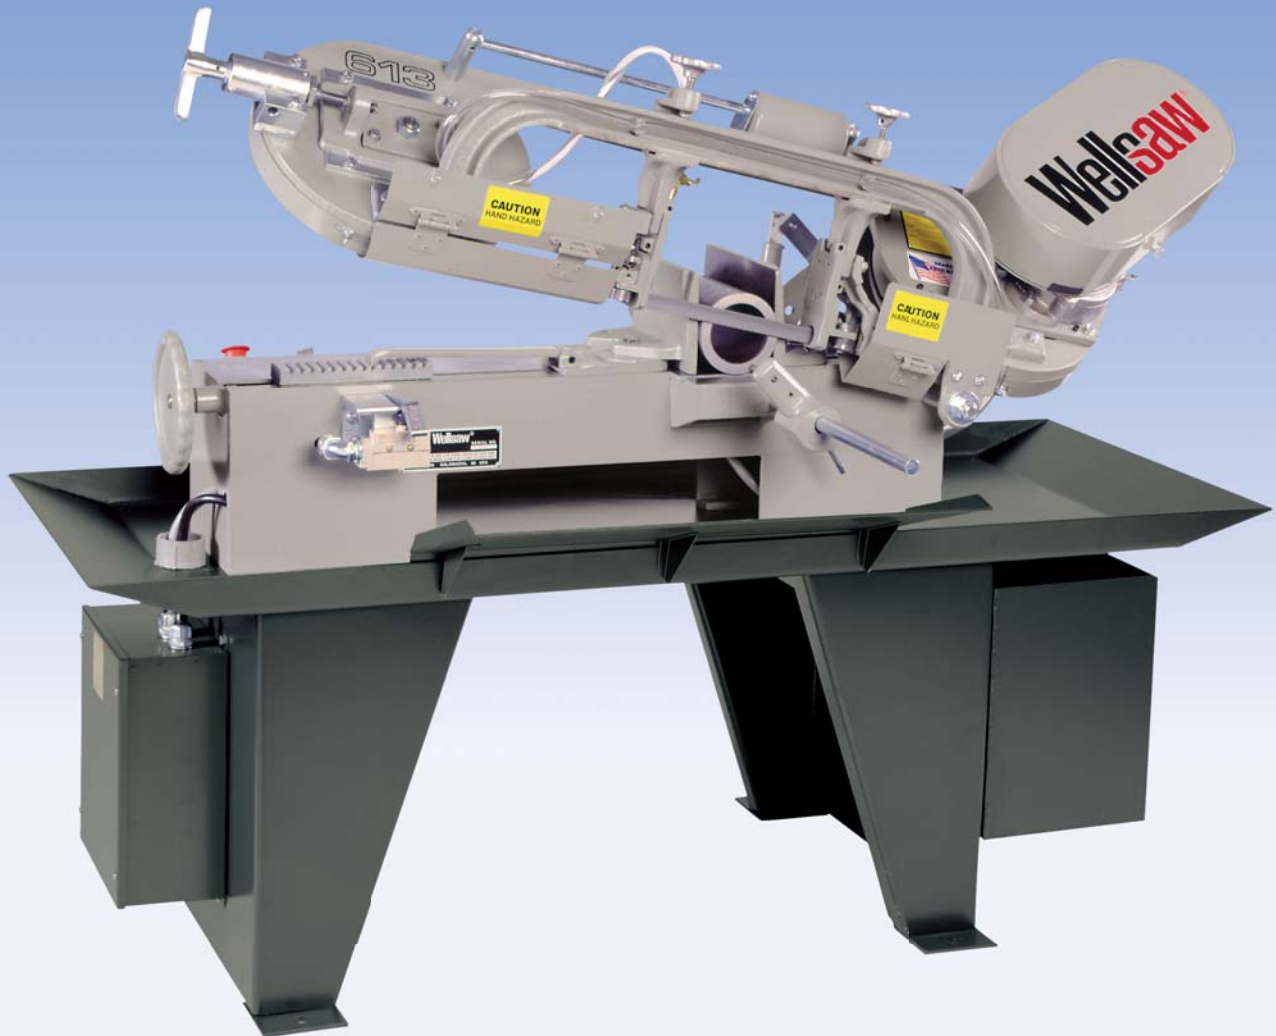

Manufactured in the United States of America

www.hodie.com


Wellsaw[®]

Built better to work stronger and last longer

7200 Interstate 20 • Kennedale, TX 76060

613

Model 613 Manual Bandsaw

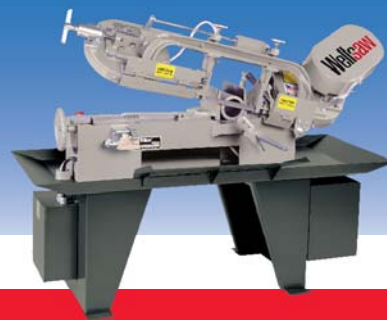

Standard Features

Hydraulic Feed Control with Adjustable Counterbalance Spring

Ball Bearing Blade Guides

Perimeter Ring Gear Blade Drive

1hp Baldor® Motor

Four Blade Speeds

Rite-Tension® Band Tensioning Device

Wet Cutting System

Blade Brush

110 Volts at Controls

Overload and Undervoltage Protection

Precision Ground Bed

Quick Acting Vise

Positive Frame Lock

Adjustable Stock Stop

Auto Shut-Off at End of Cut

OSHA Blade Guarding

Tiger-Tooth® Bi-Metal Blade

Coolant for Initial Start-Up

Specifications

Capacity

Round 7"

Flat 13"

Rectangular 6" x 13"

45° Angle 6" x 6-1/2"

Blade Size 3/4" x .035" x 8'3"

Blade Speeds 50-90-160-250 SFPM

Blade Guides Six Sealed Ball Bearings

Blade Tension Manual Rite-Tension®

Electrical Options 115-208-230/60/1 or
208-230-460/60/3

Coolant System

Tank Capacity 8 Gallons

Submersible Pump 115V/.6 Amp/170 GPH

Vise Control Manual Screw

Swivel Vise To 45°

Feed Control Hydraulic with Adjustable
Counterbalance

Band Wheels 11" Diameter Cast Iron

Bed Height 29"

Floor Area 25"W x 60"L

Shipping Weight Approx. 650 Lbs.

Available Factory Installed Options

Variable Speed Blade Drive (70-375 SFPM)

Casters (Set of 4, 2 Locking)

NFPA Electrics (with Disconnect)

Totally Enclosed Motor

Work Light with Transformer

Stock Stand

5' and 10' Non-Powered Conveyors

Wellsaw®